
K18

Outline Dimensions

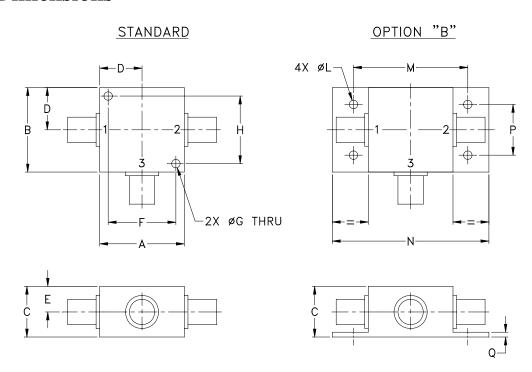

CASE#	A	В	C	D	Е	F	G	Н	J	K	L	M	N
K18	1.25	1.25	.75	.63	.38	1.000	.125	1.000		-	.125	1.688	2.18
	(31.75	(31.75)	(19.05)	(16.00)	(9.65)	(25.40)	(3.18)	(25.40)			(3.18)	(42.88)	(55.37)

CASE#	P	Q	WT. GRAMS
K18	.75 (19.05)	.07 (1.78)	70.0

Dimensions are in inches (mm). Tolerances: 2 Pl. \pm .03; 3 Pl. \pm .015

Notes:

1. Case material: Aluminum alloy.

2. Case finish:

For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.

For Non-RoHS Case Styles: Yellow hexavalent chrome based conversion coating.

Due to transition from non-RoHS to RoHS, models will be supplied with either

case style finish until the non-RoHS case inventory is depleted.

3. Mounting bracket available on request. Add suffix B to part number.

4. For port marking 1, 2, and 3 see specifications data sheet.

5. For bracket version, option B, dimension "C" changes from .75 to .94 inches when connectors are type N.



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified